

Suppressing Riser-Based Slugging in Multiphase Flow by State Feedback

Hardy B. Siahhaan, Ole M. Aamo, and Bjarne A. Foss

Abstract—This paper proposes a state feedback design method for attenuating severe slugging in multiphase flow pipeline systems. The feedback is designed based on the input-output linearization method, and incorporates the saturation effect on the input. The designed feedback can suppress the slugging phenomena provided some sufficient conditions are satisfied. Finally, checking the conditions lead to the selection of the variable which is 'more relevant' to be controlled.

I. INTRODUCTION

The theoretical development of stabilization of multiphase flow in oil-production pipelines is still in its infancy. The stabilization is related to the purpose of suppressing an oscillation phenomenon, called severe slugging, that occurs in pipelines carrying multiphase flow. Severe slugging in pipelines is caused by inclined or vertical pipe sections, and is potentially damaging to downstream processing equipment such as separators. Moreover, large oscillations may cause lower oil production. While the traditional remedy is to manually choke the flow at the expense of lower production, automatic control has the potential of removing oscillations without production loss (see [5] for the potential benefit of suppressing slug). It is therefore essential to develop control strategies that guarantee attenuation of severe slugging.

An important step in the development of a stabilization scheme in this direction can be traced back to [6], where it was shown that active choking could remove oscillations in a vertical riser. In [3], [4], [5], it was shown that by stabilizing the riser base pressure by active choking, large oscillations are effectively removed. Despite the fact that active control manages to suppress slugging, none of the previous works, to the best of our knowledge, has proved from a mathematical point of view why the control scheme works.

In this paper, we design a state feedback control law which is able to suppress severe slugging occurring in the model developed in [8]. Theoretically, the feedback can achieve regulation of the output to its set-point. The feedback is based on the input-output linearization approach, where the output is chosen such that it satisfies certain conditions.

II. MODEL

Mathematical models of multiphase flow can be found in for instance [1], [2], [8], [9], and are usually of different type depending on the application and the assumptions made. In this paper, we consider a mathematical model of

This work was supported by the Gas Technology Center at NTNU, Statoil and the Norwegian Research Council

All authors are with the Department of Engineering Cybernetics, Norwegian University of Science and Technology, 7491 Trondheim, Norway.

E-mail of corresponding author: siahhaan@itk.ntnu.no

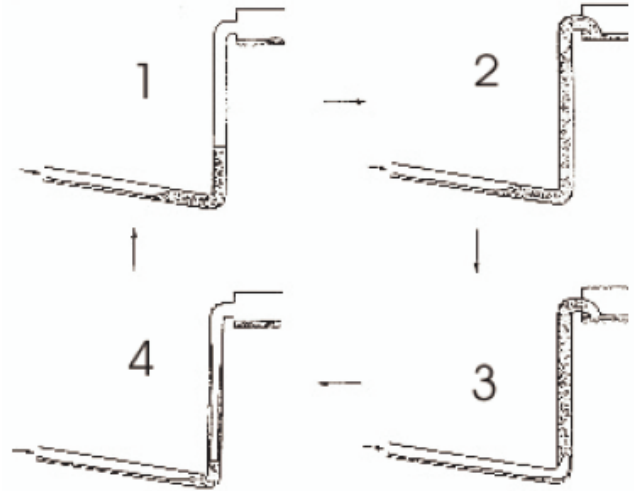


Fig. 1. Severe slugging in the pipeline-riser system

multiphase flow [8] which captures gravity-induced slugging in a pipeline-riser system where the inclination of the pipe may vary from case to case, while the riser is vertical. Generally, severe slugging in the riser can be described as follows (see Fig. 1). When multiphase flow (gas and liquid) enter the riser at relatively low rate, the liquid stays in the riser base. The liquid will block the gas from entering the riser until the pressure of the gas upstream the riser base can overcome the hydrostatic pressure of the liquid in the riser. When the pressure of the gas is high enough, the gas penetrates into the riser, violently pushing the accumulated liquid out of the riser. This behavior causes high fluctuations in the separator, and may damage it.

The model (see Fig. 2) can be written as

$$\dot{x}_1 = w_{gc} - w_g(x), \quad (1)$$

$$\dot{x}_2 = w_g(x) - w_{gp}(x, u), \quad (2)$$

$$\dot{x}_3 = w_{oc} - w_{op}(x, u), \quad (3)$$

where $x = [x_1, x_2, x_3]^T$ is the state of the system, x_1 is the total mass of gas in the volume upstream of the riser base (volume one), x_2 is the total mass of gas in the riser (volume two), x_3 is the total mass of oil, u is the opening position of the production orifice (control input to the system), w_{gc} is the constant mass flow rate of gas into volume one, w_g is the mass flow rate of gas from volume one into volume two, w_{gp} is the mass flow rate of gas through the production

We can rewrite the system as

$$\dot{x}_1 = w_{gc} - w_g(x, \psi), \quad (7)$$

$$\dot{x}_2 = w_g(x, \psi) - [1 - \alpha_L^m(x, \psi)] w_p(x, \psi) u, \quad (8)$$

$$\dot{x}_3 = w_{oc} - \alpha_L^m(x, \psi) w_p(x, \psi) u, \quad (9)$$

and the dynamics of the variable to be controlled can be expressed as

$$\dot{\psi} = f_\psi(x) + g_\psi(x) u \quad (10)$$

where

$$\begin{aligned} f_\psi(x) &= \frac{\partial \psi}{\partial x_1} (w_{gc} - w_g(x, \psi)) + \frac{\partial \psi}{\partial x_2} w_g(x, \psi) \\ &\quad + \frac{\partial \psi}{\partial x_3} w_{oc}, \\ g_\psi(x) &= - \left[\frac{\partial \psi}{\partial x_2} (1 - \alpha_L^m(x, \psi)) + \frac{\partial \psi}{\partial x_3} \alpha_L^m(x, \psi) \right] \times \\ &\quad w_p(x, \psi). \end{aligned}$$

We assume that the selection of $\psi(x)$ guarantees that the following assumptions are satisfied.

Assumption 1 $g_\psi(x) \neq 0$ for $x \in D$.

Assumption 2 The sets

$$\{x \in D \mid g_\psi(x) < 0, f_\psi(x) < 0, \psi(x) - \psi^* < 0\} \quad (11)$$

$$\{x \in D \mid g_\psi(x) > 0, f_\psi(x) > 0, \psi(x) - \psi^* > 0\} \quad (12)$$

are empty.

Assumption 3 $|g_\psi(x)| \geq |f_\psi(x)|$ for $x \in D$.

Proposition 1 Under Assumption 1 and the feedback

$$u = \frac{f_\psi(x) + \lambda(\psi(x) - \psi^*)}{-g_\psi(x)} \quad (13)$$

where $\lambda > 0$, the equilibrium point $\psi = \psi^*$ is asymptotically stable.

Proof: By Assumption 1 the feedback (13) does not have any singularity in the domain D . Applying the feedback scheme (13) in (10) yields

$$\dot{\psi} = -\lambda(\psi - \psi^*).$$

Consider the Lyapunov function candidate $V = (\psi - \psi^*)^2$. Then its time derivative

$$\dot{V} = -2\lambda(\psi - \psi^*)^2$$

is negative definite. ■

In applications, the feedback in the form (13) has to be saturated since u is the valve opening which is in the range between zero and one. The following theorem presents the result on saturated feedback.

Theorem 1 Consider

$$\dot{\psi} = f_\psi(x) + g_\psi(x) \tilde{u} \quad (14)$$

$$\tilde{u} := \begin{cases} 0, & \text{if } u < 0 \\ u, & \text{if } 0 \leq u \leq 1 \\ 1, & \text{if } u > 1 \end{cases} \quad (15)$$

Under Assumption 1, 2 and 3 and the feedback u in the form (13), the equilibrium point $\psi = \psi^*$ is asymptotically stable.

Proof: Consider the Lyapunov function candidate $V = (\psi - \psi^*)^2$. We have $\dot{V} = 2(\psi - \psi^*)\dot{\psi}$.

- 1) Case $0 \leq u \leq 1$: See the proof of Proposition 1.
- 2) Case $u < 0$: If $g_\psi(x) < 0$, then (13) gives $f_\psi(x) < \lambda(\psi^* - \psi(x))$. Then by (11) of Assumption 2 we have

$$\dot{V} = 2(\psi - \psi^*) f_\psi(x) < 0.$$

The result in the case of $g_\psi(x) > 0$ is achieved similarly using (12).

- 3) Case $u > 1$: For the case $g_\psi(x) < 0$, (13) implies $f_\psi(x) + g_\psi(x) > \lambda(\psi^* - \psi(x))$. By Assumption 3 we then have $0 > f_\psi(x) + g_\psi(x) > \lambda(\psi^* - \psi(x))$ which implies $\psi(x) - \psi^* > 0$. Then

$$\dot{V} = 2(\psi - \psi^*) (f_\psi(x) + g_\psi(x)) < 0.$$

The result in the case of $g_\psi(x) > 0$ is achieved similarly. ■

Remark 1 Assumption 1 is imposed to avoid singularity in the feedback (13).

Remark 2 Assumption 2 is imposed for the case of saturation whenever the feedback (13) has negative value.

Remark 3 In Subsection III-B we use another condition to replace Assumption 1 and 2. It is sufficient to have

$$f_\psi(x)g_\psi(x) < 0 \text{ for } x \in D \quad (16)$$

to guarantee Assumption 1 and 2 to hold. The main reason for this is that, based on exhaustive simulation runs, the new condition is also necessary for Assumption 1 and 2.

Remark 4 Assumption 3 is imposed when $u > 1$ since we need to show that $[f_\psi(x) + g_\psi(x)]g_\psi(x) > 0$ in the proof of Theorem 1. However, the saturated feedback scheme may still guarantee convergence when $|g_\psi(x)| < |f_\psi(x)|$. For example, in the case $g_\psi(x) < 0$ where $f_\psi(x) + g_\psi(x) > 0$ at some x it follows that $f_\psi(x) + g_\psi(x) > \max[0, \lambda(\psi^* - \psi(x))]$ which gives

$$\dot{V} = 2(\psi - \psi^*) \dot{\psi} = 2(\psi - \psi^*) (f_\psi(x) + g_\psi(x))$$

and thus

$$\begin{aligned} \dot{V} &> 0, & \text{if } \psi - \psi^* > 0 \\ \dot{V} &< -2(\psi - \psi^*)^2, & \text{if } \psi - \psi^* < 0. \end{aligned}$$

Consequently convergence is guaranteed whenever $\psi - \psi^* < 0$. In the case of $\psi - \psi^* > 0$, no conclusion can be made.

In practical applications, the model of multiphase flow in Section II may be modified to meet certain objectives. For instance, the equation for the production valve may vary depending on the type of valve being used. In the case of modification of the terms w_g, w_{gp}, w_{op} in the model, the feedback (13) can easily be modified. Thus, our feedback is quite flexible to modification of the model.

B. Selection of Variable-To-Be-Controlled

This subsection provides some approaches on selecting the controlled variables ψ which fit the proposed feedback scheme. In short the approaches should meet the conditions in Assumption 1, 2 and 3, at least in some region of a given set-point. These approaches are not exact, but to some extent they can be used as guidelines for selecting the controlled variables.

1) *Empirical Approach*: The first approach is to plot the functions f_ψ and g_ψ for a given data set and then select the variables, which satisfy Assumption 1 and 2, from the plots. For this purpose we run a simulation of the system with a given set of parameters. In this case the parameters are set so that

$$\begin{aligned} V_{G1} &= 12.158 \text{ m}^3 & \rho_L &= 750 \text{ kg/m}^3 \\ \theta &= 0.0274 \text{ rad} & H_1 &= 0.12 \text{ m} \\ H_2 &= 300 \text{ m} & H_3 &= 0.12 \text{ m} \\ L_3 &= 100 \text{ m} & A_1 &= 0.4128 \text{ m}^2 \\ A_2 &= 0.0113 \text{ m}^2 & A_3 &= 12 \text{ m}^2 \\ R &= 8314 \text{ J/(K*Kmol)} & T &= 308 \text{ K} \\ M_G &= 35 \text{ kg/Kmol} & g &= 9.81 \text{ m/s}^2 \\ P_0 &= 50 \times 10^5 \text{ N/m}^2 & V_T &= 4.8329 \text{ m}^3 \\ n &= 2.55 & K_1 &= 0.0051 \\ K_2 &= 4.3983 & K_3 &= 0.2030 \end{aligned}$$

The opening of the production orifice is set to 50% ($u = 0.5$). The simulation is run for 30 minutes and the states oscillate as shown in Fig. 3. This means that the constant input of 50% opening induces severe slugging. Note that our purpose in the end is to stabilize a variable at a certain set-point and then to see whether it will suppress the slugging or not. A set-point here means a point which is associated with the equilibrium condition $\dot{x} = 0$, when a certain constant input u is applied. In this case the input u could be a constant value between zero and one.

The candidates for the controlled variable are $\rho_{G1}, P_1, V_L, \rho_{mix}, V_{LR}, h_1, V_{G2}, P_2, \alpha_L, \phi, A, v_{G1}, \rho_{G2}, w, \alpha_{LT}, \rho_T, \alpha_L^m$ and w_g . All these variables are dependent on the state x (see Section II). Based on the available data set for 30 minutes the only variables which satisfy (16) are V_L, h_1, P_2 and ρ_{G2} (see Fig. 4). Note that we skip the plots associated with ρ_{G2} as they are equivalent to those with P_2 (see also from the equations of ρ_{G2} and P_2 in Section II). The next step is to check whether Assumption 3 is also satisfied for V_L, h_1 and P_2 . Fig. 4 shows that none of the chosen variables satisfy the required condition of Assumption 3.

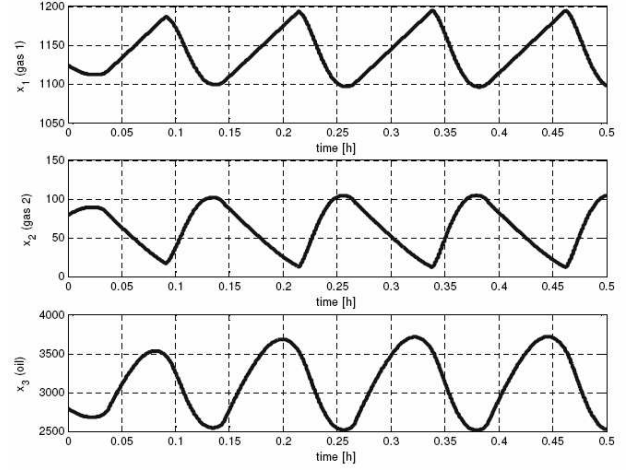


Fig. 3. The state x for $u = 0.5$

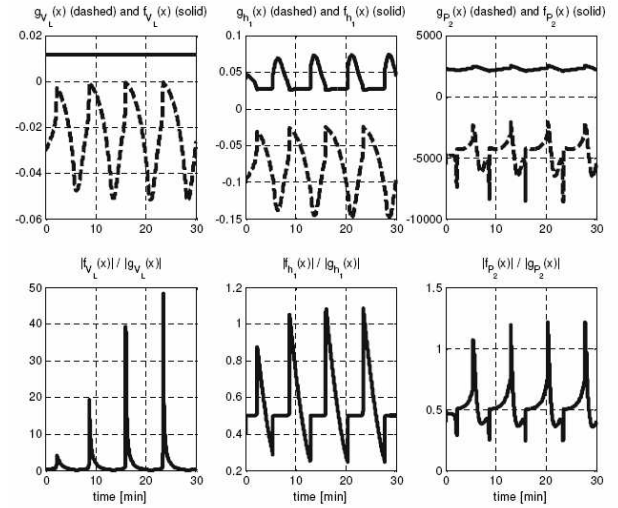


Fig. 4. $g_\psi(x)$, $f_\psi(x)$ and $|f_\psi(x)|/|g_\psi(x)|$ for V_L, h_1 and P_2 in the case $u = 0.5$

We should keep in mind that the current selection process is based on the data set of severe slugging where large magnitude of oscillatory behavior of the state x is expected. This is the reason why at some times Assumption 3 is not satisfied for V_L, h_1 and P_2 . As a comparison we perform another simulation for 10% of opening of the production orifice which is in the stable region. The response of the state to the input $u = 0.1$, when the initial condition is associated with an oscillatory behavior, can be seen from Fig. 5 where the state finally converges to a set-point after oscillating. Fig. 6 shows the corresponding plots of $g_\psi(x)$, $f_\psi(x)$ and $|f_\psi(x)|/|g_\psi(x)|$ for V_L, h_1 and P_2 . It indicates that during the small magnitude of oscillation of the state x , the magnitude of function f_ψ is always smaller than that of g_ψ . Thus we can say that whenever the magnitude of oscillation is small we can select V_L, h_1 and P_2 as the controlled variable in our scheme.

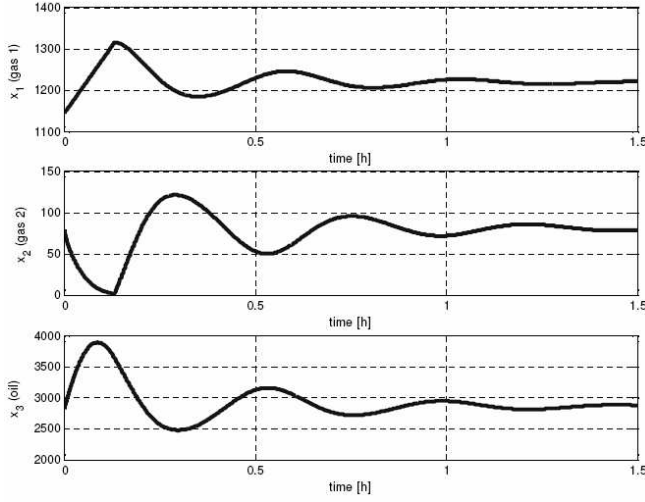


Fig. 5. The state x for $u = 0.1$

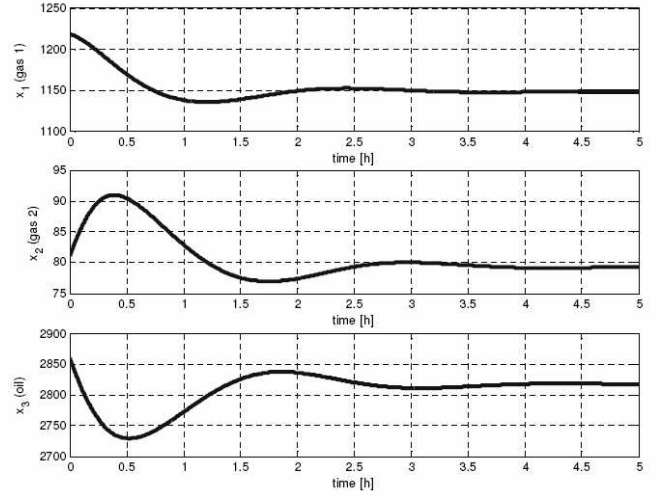


Fig. 7. The state x (when h_1 is the controlled variable)

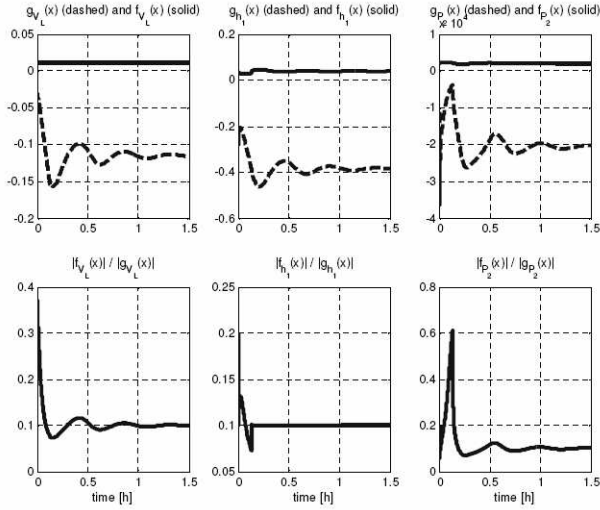


Fig. 6. $g_\psi(x)$, $f_\psi(x)$ and $|f_\psi(x)|/|g_\psi(x)|$ for V_L , h_1 and P_2 in the case $u = 0.1$

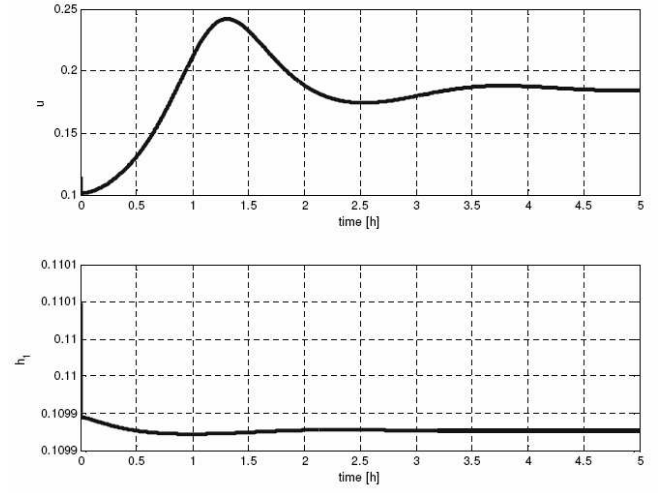


Fig. 8. The feedback u and the liquid level h_1 as the controlled variable

2) *Analytical and Empirical Approach*: The next approach is a mixture of analytical and empirical nature. The candidates to be assessed by this approach is the total mass of the liquid x_3 and the total mass $M = x_1 + x_2 + x_3$. We then obtain

$$\begin{aligned} f_{x_3}(x) &= w_{oc} > 0, & g_{x_3}(x) &= -\alpha_L^m(x)w_p(x) < 0 \\ f_M(x) &= w_{gc} + w_{oc} > 0, & g_M(x) &= -w_p(x) < 0 \end{aligned}$$

where $f_\psi(x)$ is a constant for both cases. By (16), Assumption 1 and 2 are satisfied. In the event of severe slugging, as a result of blocking, the total mass flow rate through the production valve ($w_p(x)$) and the oil fraction (mass basis) through the production valve ($\alpha_L^m(x)$) become very small. As a result the absolute value of $g_\psi(x)$ is very small compared to that of $f_\psi(x)$ for x_3 and M . Consequently Assumption 3 is not satisfied. On the other hand, when there is no slugging, using the same reasoning we can guarantee that the absolute

value of $g_\psi(x)$ is big enough to satisfy Assumption 3 for x_3 and M .

3) *Closed Loop Investigation*: In real applications, especially for safety reasons, large oscillatory behavior is avoided. The large magnitude of oscillation can be avoided during stabilization of an unstable set-point by selecting an initial set-point which is associated with the stable region (the opening of the production orifice which does not induce slugging). By slowly changing the set-point from the stable one to the slugging region while the controller is working, stabilization is also achieved.

For closed loop simulation with the feedback when the controlled variable is h_1 , we set $\lambda = 2 \times 10^8$. The initial condition is set to the point associated with the stable region of constant opening $u = 0.1$. The purpose of the feedback is to stabilize h_1 at the point 0.1099 which is associated with the equilibrium condition of $u = 0.2$ (slugging case).

In Fig. 7 we can see that the states converge to a point and the state feedback does not experience saturation (Fig. 8). Unfortunately the state feedback u does not converge to the desired set point of 0.2. Instead the state feedback u converges to the point 0.1877. To understand what happen we can observe the plot of h_1 in Fig. 8. The variable h_1 converges to the point 0.1099 which is the point associated with the equilibrium condition of $u = 0.2$. But apparently the point $h_1 = 0.1099$ is also associated with the equilibrium condition of $u = 0.1877$. In this case the controller actually works well that the controlled variable h_1 converges to 0.1099 even though u converges to another point. In this case the internal dynamic of the system does not evolve as what is expected. Thus the selection of h_1 as the variable to be controlled has a drawback in that the state x is 'unobservable' from the information given by h_1 .

With the same initial condition we try another feedback where the variable to be controlled is P_2 . The constant λ is set to 3000. The feedback is designed in such a way that the system moves from the initial condition associated with the equilibrium condition of $u = 0.1$, gradually with step 0.1, to the final one of $u = 0.5$. The results of the simulation using the feedback can be seen in Fig. 9 and Fig. 10 where all the states are converging and the feedback also converges to the desired points. Thus the feedback works well when the variable to be controlled is P_2 . The same type of results are also obtained when we select M and x_3 (equivalently V_L ; see Section II) as the controlled variable.

Clearly, the foregoing stabilization scenario of P_2 , x_3 and M indicates that severe slugging can be suppressed as satisfactorily demonstrated by the results of simulation of the states. Validating the results analytically needs a further investigation which is not easy since the model is quite complicated. However, validation can be done easily in the case of selecting x_3 as the controlled variable. Stabilizing the controlled variable x_3 at a set-point guarantees that the total mass of liquid (oil) does not fluctuate and thus no blockage occurs. In this case severe slugging can be avoided and we can ignore whether x_1 and x_2 oscillate or not.

IV. CONCLUDING REMARK

An early phase in the design method of state feedback for the purpose of suppressing riser-induced slugging occurring in a vertical pipeline has been presented. The method utilizes the input-output linearization techniques. Under certain conditions the feedback scheme is guaranteed to work in the case of saturation. These conditions can be applied as bases for selecting the variable to be controlled. By carefully selecting the variable to be controlled the feedback scheme can avoid severe slugging. Although the selection processes are not exact, they can be used as guidelines for suppressing riser-based slugging.

REFERENCES

[1] O.M. Aamo, G.O. Eikrem, H.B. Siahann and B.A. Foss, "Observer Design for Multiphase Flow in Vertical Pipes with Gas-Lift: Theory and Experiments", *Journal of Process Control*, 5, Issue 3, pp. 247-257, 2005.

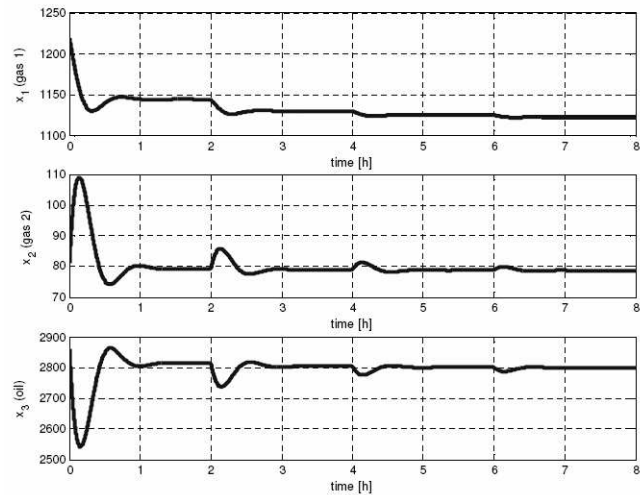


Fig. 9. The state x (when P_2 is the controlled variable)

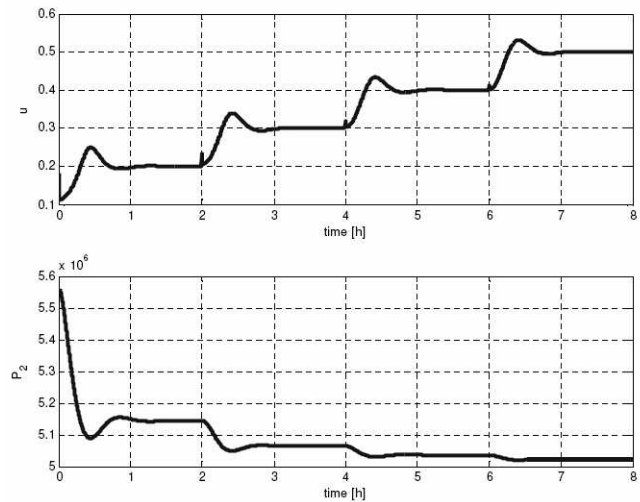


Fig. 10. The feedback u and the pressure P_2 as the controlled variable

[2] K. Bendiksen, D. Malnes and O. Nydal, "On the Modelling of Slug Flow", *Chemical Engineering Science*, 40, pp. 59-75, 1985.

[3] M. Dalsmo, E. Halvorsen and O. Slupphaug, "Active Feedback Control of Unstable Wells at the Brage Field", *SPE Production and Facilities*, SPE 77650, 2002.

[4] K. Havre and M. Dalsmo, "Active Feedback Control as a Solution to Severe Slugging", *SPE Production and Facilities*, SPE 79252, pp. 138-148, 2002.

[5] K. Havre, K.O. Stornes and H. Stray, "Taming Slug Flow in Pipelines", *ABB Review*, 4, Dec. 2000.

[6] P. Hedne and H. Linga, "Suppression on Terrain Slugging with Automation and Manual Riser Choking", *Advances in Gas-Liquid Flows*, pp. 453-460, 1990.

[7] H. K. Khalil. *Nonlinear Systems*, Prentice Hall, 3rd. ed. 2002.

[8] E. Storkaas, S. Skogestad and J. Godhavn, "A Low Dimensional Model of Severe Slugging for Controller Design and Analysis", *Proc. Multi Phase '03*, San Remo, Italy, 11-13 June 2003.

[9] Y. Taitel and D. Barnea, "Two Phase Slug Flow", *Advances in Heat Transfer*, 20, pp. 71-103, 1990.